


Window box




■ The window box provides the connection between the hull and the accommodation system. A piece of flat steel should be laid around the window before the window box is mounted to simplify installation. Window boxes can be supplied with prefabricated cut-outs for windows. A special steel outer sliding frame is used to compensate for tolerances. The window-box body is designed to resist natural vibrations.

A large variety of surface finishes are available; all of them have a removable protective foil to prevent any damage from occurring during installation. The design of the window box and all components used have been tested and approved according to international standards.

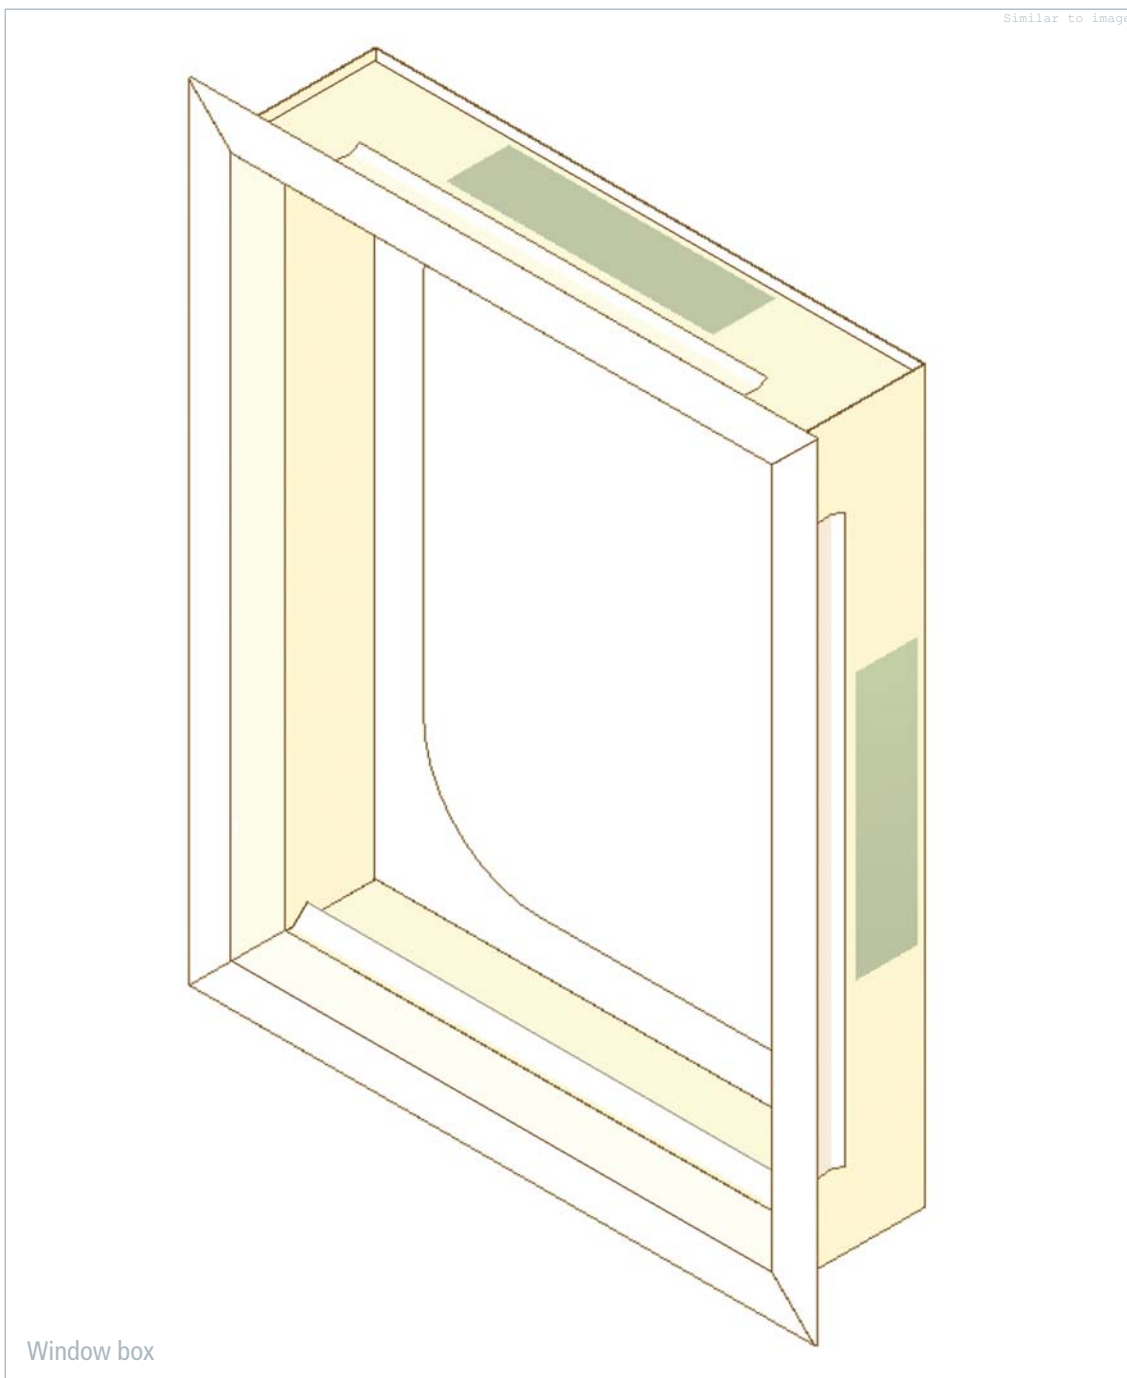

Others



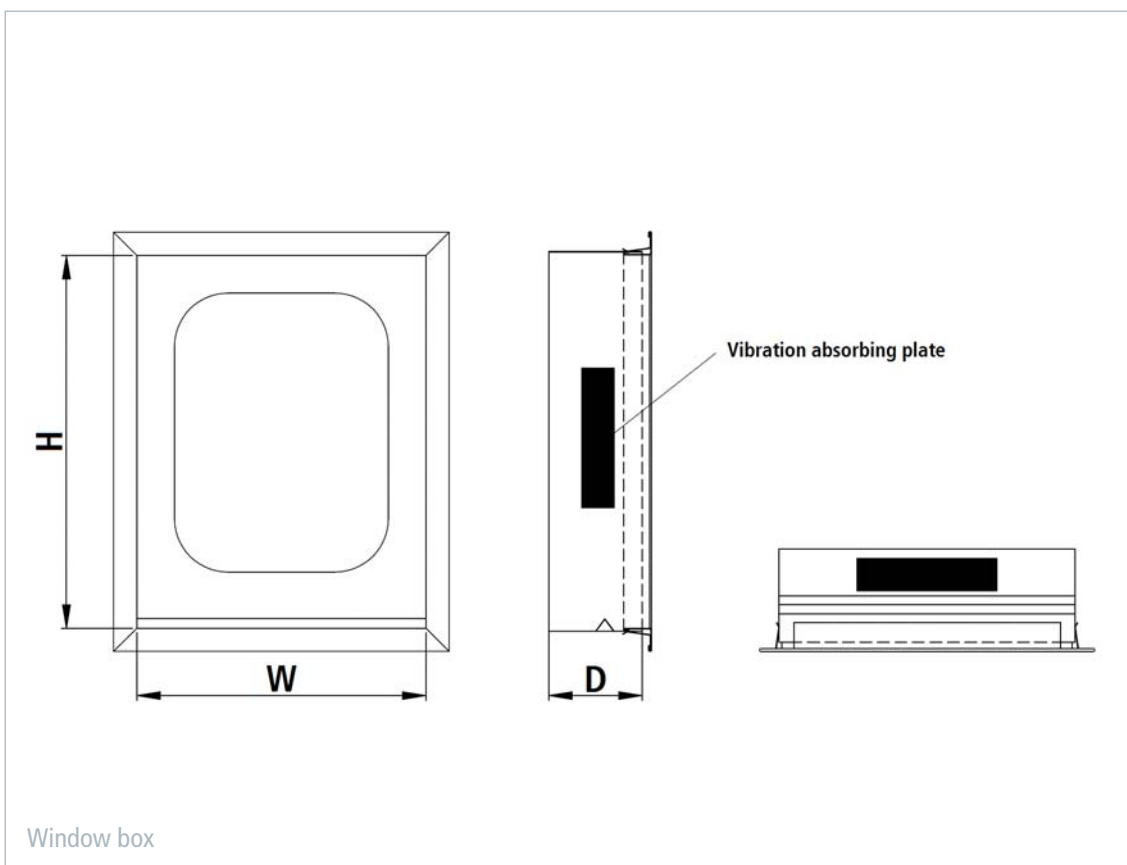

Window box	
Technical data	Steel or Stainless steel
Fire classification	B-0 (higher rating in progress)
Element width	max. 1590 mm
Element length	max. 1460 mm
Sliding frame	Steel or Stainless steel
Mass per area	ca. 8.9 kg/m ² (H = 800 mm, W = 620 mm, D = 140 mm)
Density of insulation material	n/a
Coating	PVC foil varnish coated (others on request)
Certification	EC, USCG, RMSR