

## Hatch with hidden hinges




■ The hatch with hidden hinges conforms to fire classification C and impresses with its outstanding functionality. Compared to traditional hatches, this system is closed by using a push lock, i.e. the hatch can be opened and closed using an integrated pushbutton. All dimensions can be produced to meet customer requirements. In order to install the hatch system, an opening is cut into the wall or deck system and the hatch is then fixed in place mechanically. A large variety of surface finishes are available; all of them have a removable protective foil to prevent any damage from occurring during installation. All components of the hatch with hidden hinges have been tested and approved according to international standards.



Others



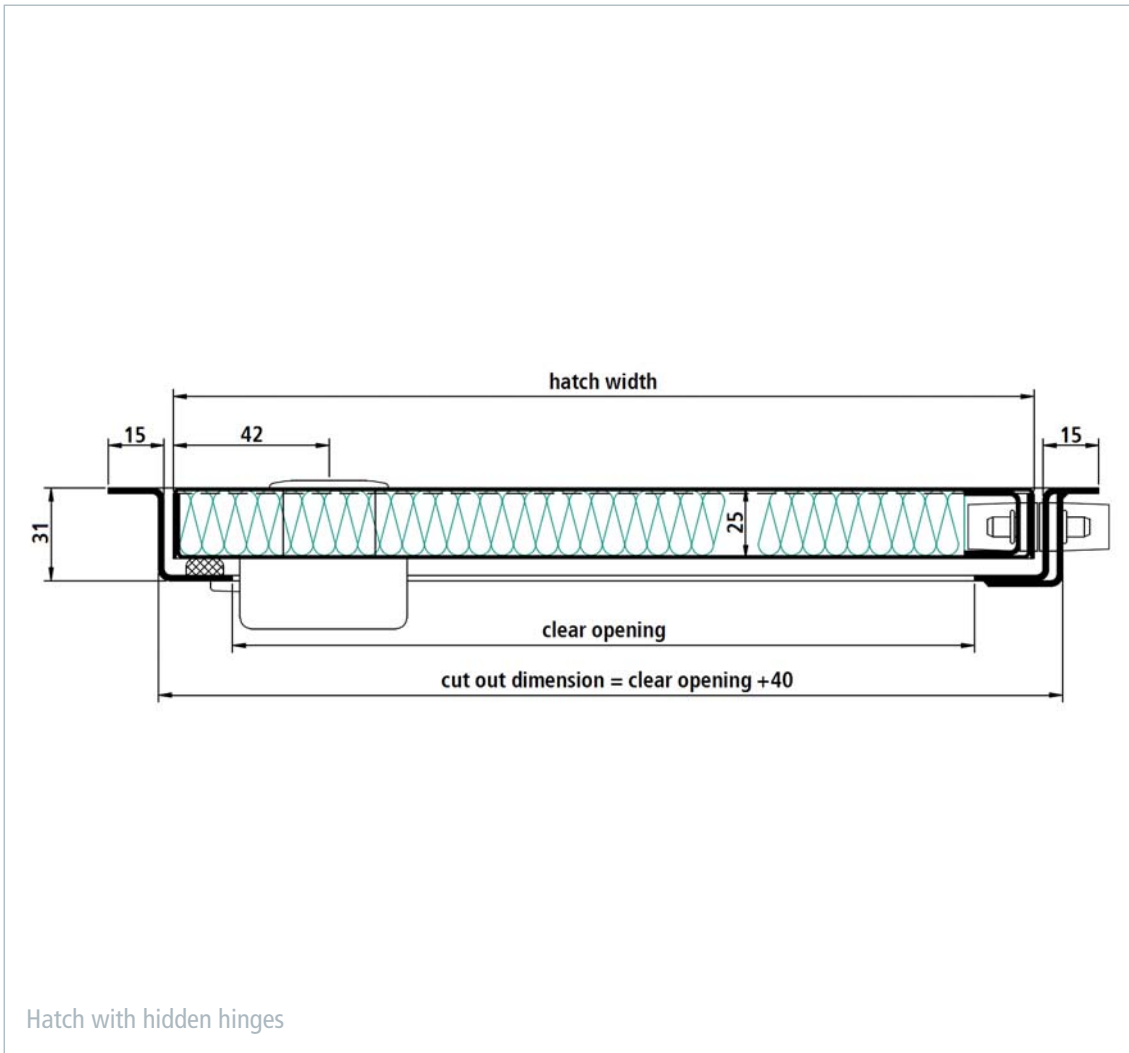

Others

Hatch with hidden hinges	
Technical data	Steel   Steel
Fire classification	C (higher rating in progress)
Element width	according to customer specification
Element length	according to customer specification
Thickness of hatch leaf	25 mm
Applicable for	C constructions
Mass per area	---
Density of insulation material	150 kg/m <sup>3</sup>
Coating	PVC foil varnish coated (others on request)
Certification	n/a